

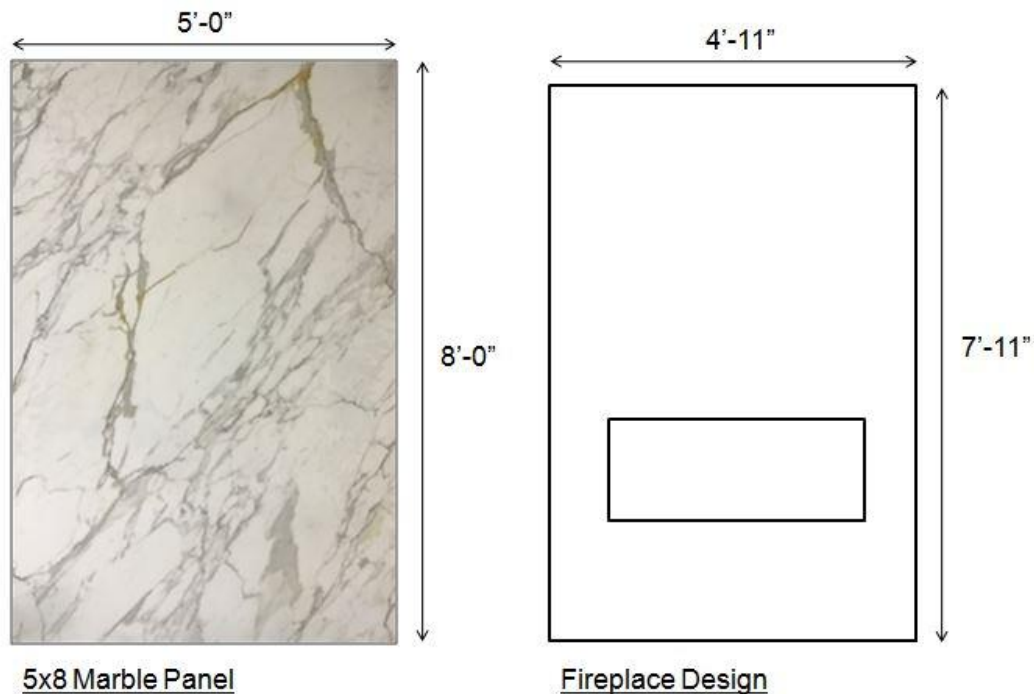


ESTIMATING AND ORDERING GUIDE

1. Prima Stone Panels are manufactured into standard 5'x8', 4'x8' & 3'x8' panels. Please check with local rep for in-stock inventory and sizing.
2. Custom cutting during manufacturing process for larger projects is possible. Please allow 8-12 weeks for custom manufacturing. Additional shipping and crating charges may apply for custom orders.
3. For best installation results please specify stone to be 1" inch larger than required surface area. This allows installer to accommodate for any rough edges due to transport or inconsistency in substrate. See Diagram below.

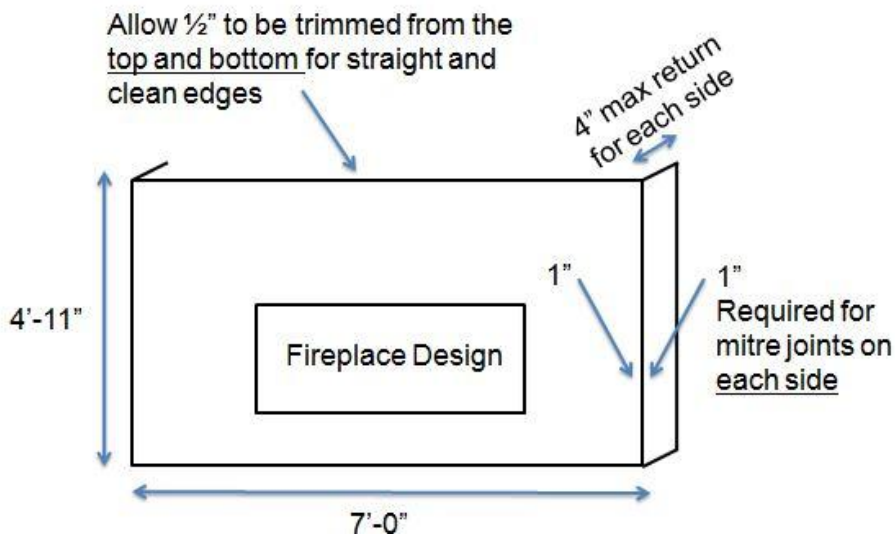

4. When estimating mitres, please allow 2 inches of additional stone material per mitred edge.
- For example, if a fireplace face is 4 feet wide and you require it to wrap around, the maximum allowable return would be 4 inches per side.
 - The maximum allowable width for a panel mitred on both edges is 4'10" on the 5 foot length or 7'10" on the 8 foot length. Please check with local rep if you have any questions. See Picture below.

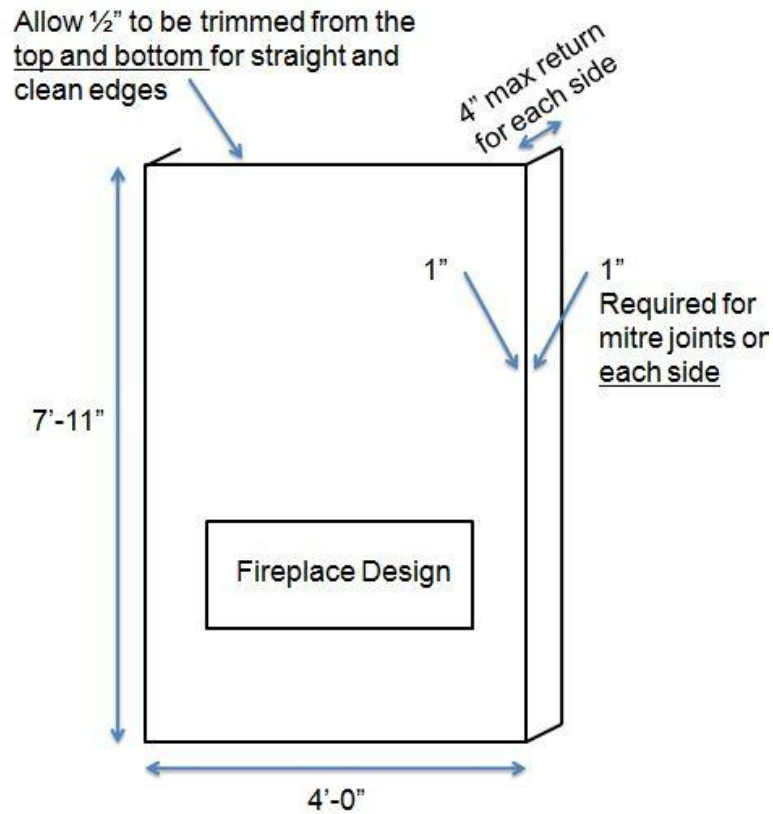

5. Natural stone is quarried and has inherent characteristics such as fissures, and is therefore always imperfect. Although we aim to match veining as closely as possible in our book-matched sets, each panel will vary slightly.
6. Natural stone may contain pits or fissures that require filler for stability purposes. This is common practice in the stone industry. Please carefully review images to ensure you are comfortable with fill pattern. Most common occurrences of fillers are polished after cutting and likely look like intended characteristics of stone.
7. Prima Stone allows clients access to our image gallery to select and approve stone panels. Please note that images contained in our gallery are those items that are currently in stock and are guaranteed only with deposit.